

MATT-FOIL



MF2

High tensile double-sided aluminium radiant barrier woven foil / film

MF2 is a five (5) layer double-sided radiant barrier with excellent tear and punctures resistance and makes it easy to handle during construction. It has superior radiant heat reflective properties by reflecting ~ 95% of radiant heat.

MF2 is an environment friendly green product recognized through Green Building Index (GBI) by MGBC.

MF2 is a lamination of pure aluminium foil and aluminium film with high tensile polypropylene weave. The outstanding strength of aluminium film and HDPP woven intensifies the tensile strength and protects it against tearing during installation. The property of pure aluminium enhances the reflective index while aluminium film is added for vapor, tear and puncture resistance.

MF2 acts as a water proof sarking when installed beneath the primary roofing material, providing a vapor barrier against moisture penetration. It is lightweight, heavy duty in performance and does an excellent job at providing thermal insulation. It can be independently by eliminating the extra cost of wire mesh installation.

APPLICATIONS


- As a radiant barrier under all types of roof coverings in commercial, industrial and residential building.
- No wire netting is required for support.
- Users are advised to install this product under mineral wool and provide an air space of at least 3" (7.6 cm) below the roof to maximize the effectiveness of this product.



FRONT




BACK

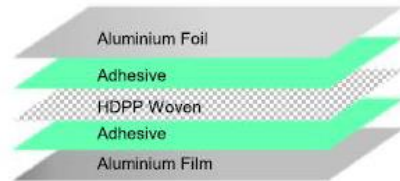

SPECIFICATION	STANDARD	UNIT	RANGE	
Grammage	Electronic scale	GSM	110 - 130	
Thickness	Digital caliper	micron	140 - 160	
Water Vapor Transmission	ASTM E96	g/m ² /day	0.71	
Water Barrier	ASTM F 1249-06	g/m ² /day	-	
Reflectivity / Emissivity	Supplier's Specification	%	95% / 5%	
Tensile Strength	Machine direction	ASTM D882 - 02	N/25mm	450 - 600
	Cross direction	ASTM D882 - 02	N/25mm	450 - 600
Elongation	Machine direction	ASTM D882 - 02	%	35 - 45
	Cross direction	ASTM D882 - 02	%	35 - 45
Tear Strength	Machine direction	ASTM D1004	N	40 - 45
	Cross direction	ASTM D1004	N	45 - 50
Puncture Resistance	ASTM F 1306 - 90	N	135 - 168	
Classification of Fire Hazard	BS 476	Class	-	

* Technical information provided represents average result of tests conducted under standard procedure and is subject to variation.

* No guarantee can be made regarding specific applications or patent rights.



FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)

Factory / HQ: 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Tel: 604-5011999

Fax: 604-5011991

Email: ask@foil-laminate.com

Branch Office: 11 (1st Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia

Tel: 603-56214868

Fax: 603-56214878

Email: ask@foil-laminate.com

