

AIR-TAC BUBBLE FOIL

BBS2FR-25



DESCRIPTION

Fire retardant double-sided single layer big air bubble aluminium foil reinforced with glass fibre scrim

BBS2FR-25 is an eight (8) layer fire retardant self-supporting double-sided reflective insulation, lamination of both side pure aluminium foil with high density polyethylene big air bubbles reinforced with glass fibre scrim.

BBS2FR-25 can be used independently without wire mesh or other mass insulation. It serves as an effective thermal insulation as well as a vapor barrier membrane. It is tear resistant, hygienic, durable, fibre-free, nontoxic, resistance to fungus, insects, nesting rodents and other pests.

FIRE PROPERTY

BBS2FR-25 is classified as **CLASS 'O'** in accordance to fire tests on building material and structures.

- British Standard, BS 476-6: Fire Propagation
- British Standard, BS 476-7: Surface spread of flame

AWARD

- Malaysian Standard, MS 2095 : 2014
- Jabatan Bomba Dan Penyelamat Malaysia
- SIRIM
- CIDB (Perakuan Pematuhan Standard (PPS))

THERMAL PROPERTY

BBS2FR-25 is tested in accordance to **ISO 8301 / MS ISO 8302**.

- Thermal resistance, R-value: 1.771 m²K/W
- Thermal transmittance, U-value: 0.565 W/m²K
- Thermal conductivity, K-value: 0.060 W/mK

BQ SPECIFICATION

To supply & install **AIR-TAC BUBBLE FOIL BBS2FR-25** under **MS2095:2014** and **CIDB** certified double-sided aluminium bubble foil as described.

GO GREEN

- Environmental friendly green product recognized through Green building Index (GBI) by MGBC

APPLICATION

- It widely used under roof for food industry, farmhouse, agricultural storage and poultry building.
- Highly recommended for building or construction which required superior radiant heat insulation and dominant tensile strength for heavy duty roof systems.
- No wire netting is required for support.
- As a reflective insulation under all types of roof coverings in commercial, industrial and residential building.

INSTALLATION GUIDELINE

- Users are advised to install this product by an air space of at least 2" (5.0 cm) below the roof to maximize the effectiveness of this product.

AIR-TAC BUBBLE FOIL, BBS2FR-25 (MS 2095 : 2014)



Reflectivity / Emissivity	ASTM C1371	≥ 95 % / ≤ 5%	
Tensile Strength (MD)	AS/NZ 1301.448s	≥ 4.5 kN/m	Extra Heavy
Tensile Strength (CD)	AS/NZ 1301.448s	≥ 3.0 kN/m	Heavy
Edge Tear Resistance (MD)	TAPPI T470	≥ 80 N	Extra Heavy
Edge Tear Resistance (CD)	TAPPI T470	≥ 80 N	Extra Heavy
Vapor Barrier (WVTR)	ASTM E96	>7 , < 450 MN.s/g	Medium
Resistance to Dry Delamination	AS/NZS 4201.1	No Delamination	Passed
Resistance to Wet Delamination	AS/NZS 4201.2	No Delamination	Passed
Shrinkage	AS/NZS 4201.3	< 0.5 %	Passed
Grammage	Electronic scale	320 - 420 GSM	
Thickness	Digital caliper	7 ± 1 mm	
Sound Reduction	In-house	12 - 13 %	Test at 87 db
Sound Transmission Loss (STC)	ISO 10140-2	8 dB	Eq. to STC 8

* Technical information provided represents average result of tests conducted under standard procedure and is subject to variation.

* No guarantee can be made regarding specific applications or patent rights.

Standard Size: 1.22m (Width) X 40m (Length)

BBS2FR-25

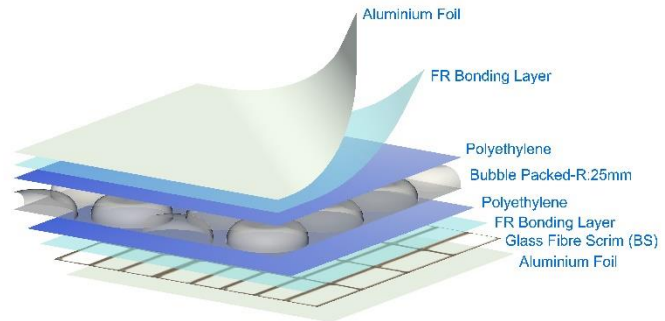

Reflective ~ Protective ~ Excellence
www.foil-laminate.com

FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)

Factory / HQ: 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Tel: 604-5011999

Fax: 604-5011991

Email: ask@foil-laminate.com

Branch Office: 11 (1st Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia

Tel: 603-56214868

Fax: 603-56214878

Email: ask@foil-laminate.com

