

# AIR-TAC BUBBLE FOIL

## BB238

Double-sided single layer small air bubble aluminium foil

**BB238** is a seven (7) layer double-sided radiant barrier. It has superior radiant heat reflective properties by reflecting ~ 95% of radiant heat.


**BB238** is an environment friendly green product recognised through Green Building Index (GBI) by MGBC.

**BB238** is a lamination of both side pure aluminium foil with high density polyethylene small air bubbles. The bubble pack retention air layer provides unique dual properties i.e. reflective and conductive insulation. The property of its double layers pure aluminium added to its thickness enhances the reflective index. Also, its construction further reduces sound transmission by moderating sound waves and vibrations within the sealed air of the bubble pack.


**BB238** can be used independently without wire mesh or other mass insulation. It serves as an effective thermal insulation as well as a vapor barrier membrane. It is tear resistant, hygienic, durable, fibre-free, nontoxic, resistance to fungus, insects, nesting rodents and other pests.

### APPLICATIONS


- It widely used under roof for food industry, farmhouse, agricultural storage and poultry building.
- Highly recommended for building or construction which required superior radiant heat insulation.
- No wire netting is required for support.
- As a radiant barrier under all types of roof coverings in commercial, industrial and residential building.



FRONT



BACK

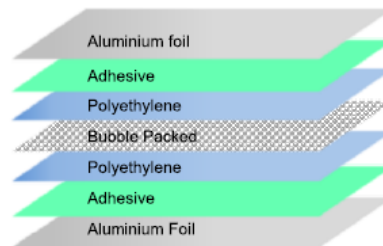

SPECIFICATION	STANDARD	UNIT	RANGE
Grammage	Electronic Scale	GSM	150 - 180
Thickness	Digital Caliper	mm	3±1
Reflectivity	Supplier's specification	%	≥ 95%
Tensile Strength Machine Direction	ASTM D882 (in-house)	N/25mm	30 - 50
Cross Direction	ASTM D882 (in-house)	N/25mm	25 - 35
Elongation Machine Direction	ASTM D882 (in-house)	%	≥ 30
Cross Direction	ASTM D882 (in-house)	%	≥ 30
Tear Strength Machine Direction	T470 (in-house)	N	25 - 35
Cross Direction	T470 (in-house)	N	25 - 35
Puncture Resistance	ASTM F1306 -90 (in-house)	N	20 - 30

*Technical information provided represents average result of tests conducted under standard procedure and is subject to variation. No guarantee can be made regarding specific applications or patent rights.*



### FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)

Factory / HQ: 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Tel: 604-5011999

Fax: 604-5011991

Email: ask@foil-laminate.com

Branch Office: 11 (1<sup>st</sup> Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia

Tel: 603-56214868

Fax: 603-56214878

Email: ask@foil-laminate.com

[www.foil-laminate.com](http://www.foil-laminate.com)

