



## BFM2

High density double-sided aluminium radiant barrier polymer film

**BFM2** is a five (5) layer highly durable self-supporting double-sided radiant barrier. It is popular for its glossy finish, tensile strength and excellent insulation. BFM2 is resistant to solvents along with acid and alkaline contaminants.


**BFM2** is an environmentally friendly green product recognised through the Green Building Index (GBI) by MGBC.

**BFM2** is a lamination of both sides aluminium film and high density polyethylene (HDPE) as a base substrate material. The specially engineered polymer provides a very low thermal conductivity and functions to be a radiant barrier foil for mild acidic / alkaline environments. The aluminium film lamination acts as an oxygen barrier and reduces vapour transmission.

**BFM2** provides excellent water resistance and high in tensile strength which eliminates the usage and extra cost of wire mesh.

### APPLICATIONS

- Designed for use where oxygen and vapour barrier functions are the primary requirement.
- It can also be used for roofing, wall and general thermal insulation.
- As a radiant barrier under all types of roof coverings in commercial, industrial and residential building.
- No wire netting is required for support.
- Can be used under all types of roof coverings and combines the feature of insulation and a waterproofing membrane.

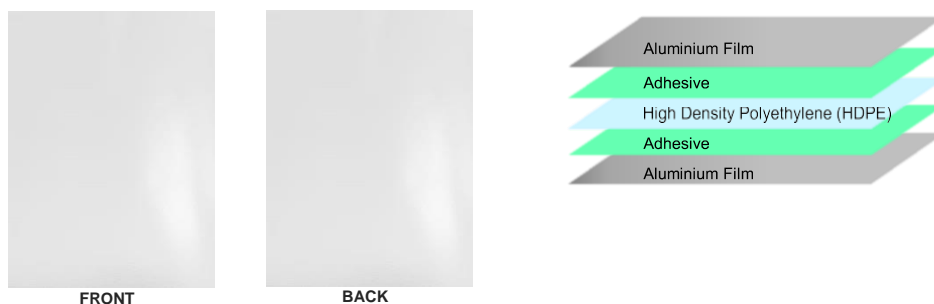

SPECIFICATION		STANDARD	UNIT	RANGE
Grammage		Electronic scale	GSM	120 - 160
Thickness		Digital caliper	micron	150 - 180
Water Vapor Transmission		ASTM F 1249-06	g/m <sup>2</sup> /day	0.2 - 0.3
Water Barrier		ASTM F 1249-06	g/m <sup>2</sup> /day	-
Reflectivity / Emissivity		Supplier's Specification	%	95 / 5
Tensile Strength	Machine direction	ASTM D882 - 02	N/25mm	170 - 190
	Cross direction	ASTM D882 - 02	N/25mm	170 - 190
Elongation	Machine direction	ASTM D882 - 02	%	50 - 60
	Cross direction	ASTM D882 - 02	%	65 - 75
Tear Strength	Machine direction	ASTM D1004	N	32 - 37
	Cross direction	ASTM D1004	N	30 - 35
Puncture Resistance		ASTM F 1306 - 90	N	70 - 80

\* Technical information provided represents average result of tests conducted under standard procedure and is subject to variation.  
\* No guarantee can be made regarding specific applications or patent rights.

Revision 1



**FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)**

**Factory:** 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Tel: 604-5011999

Fax: 604-5011991

Email: enquiry@foil-laminate.com

**Branch office:** 11 (Ground & 1<sup>st</sup> Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia

Tel: 603-56214868

Fax: 603-56214878

Email: sales@foil-laminate.com