



MF-2M

High tensile double-sided aluminium radiant barrier woven film

MF-2M is a five (5) layer double-sided radiant barrier with excellent tear and punctures resistance and makes it easy to handle during construction. It has superior radiant heat reflective properties by reflecting ~95% of radiant heat.

MF-2M is an environmental friendly green product recognised through Green Building Index (GBI) by MGBC.

MF-2M is a lamination of both side aluminium film with high tensile polypropylene woven. The outstanding strength of aluminium film and HDPP woven intensifies the tensile strength and protecting it against tearing during installation. The property aluminium film is added for vapor, tear and puncture resistance.

MF-2M acts as a water proof sarking when installed beneath the primary roofing material, providing a vapour barrier against moisture penetration. It is lightweight, heavy duty in performance and does an excellent job at providing thermal insulation. It can be independently by eliminating the extra cost of wire mesh installation.

APPLICATIONS


- As a radiant barrier under all types of roof coverings in commercial, industrial and residential building.
- No wire netting is required for support.
- Users are advised to install this product under mineral wool and provide an air space of at least 3" (7.6 cm) below the roof to maximise the effectiveness of this product.



FRONT



BACK

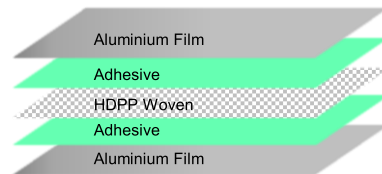

SPECIFICATION	STANDARD	UNIT	RANGE	
Grammage	Electronic scale	GSM	110 - 130	
Thickness	Digital caliper	micron	150 - 170	
Water Vapor Transmission	ASTM E96	g/m ² /day	1.01	
Water Barrier	ASTM F 1249-06	g/m ² /day	-	
Reflectivity / Emissivity	Supplier's Specification	%	95% / 5%	
Tensile Strength	Machine direction	ASTM D882 - 02	N/25mm	550 - 650
	Cross direction	ASTM D882 - 02	N/25mm	500 - 600
Elongation	Machine direction	ASTM D882 - 02	%	40 - 50
	Cross direction	ASTM D882 - 02	%	35 - 45
Tear Strength	Machine direction	ASTM D1004	N	43 - 50
	Cross direction	ASTM D1004	N	50 - 55
Puncture Resistance	ASTM F 1306 - 90	N	153 - 178	
Classification of Fire Hazard	BS 476	Class	-	

* Technical information provided represents average result of tests conducted under standard procedure and is subject to variation.
 * No guarantee can be made regarding specific applications or patent rights.

Revision 1



FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)

Factory: 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.
 Tel: 604-5011999 Fax: 604-5011991 Email: enquiry@foil-laminate.com
Branch office: 11 (Ground & 1st Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia
 Tel: 603-56214868 Fax: 603-56214878 Email: sales@foil-laminate.com