

AIR-TAC BUBBLE FOIL

BB238FR-10



DESCRIPTION

Fire retardant double-sided small air bubble aluminium foil

BB238FR-10 is a seven (7) layer self-supporting fire retardant double-sided reflective insulation, lamination of both side pure aluminium foil with high density polyethylene small air bubbles.

BB238FR-10 can be used independently without wire mesh or other mass insulation. It serves as an effective thermal insulation as well as a vapor barrier membrane. It is tear resistant, hygienic, durable, fibre-free, nontoxic, resistance to fungus, insects, nesting rodents and other pests.

FIRE PROPERTY

BB238FR-10 is classified as **CLASS 'O'** in accordance to fire tests on building material and structures.

- British Standard, BS 476-6: Fire Propagation for products
- British Standard, BS 476-7: Surface spread of flame test

AWARD

- Malaysian Standard, MS 2095 : 2014
- Jabatan Bomba Dan Penyelamat Malaysia
- SIRIM
- CIDB - Perakuan Pematuhan Standard (PPS)

THERMAL PROPERTY

BB238FR-10 is tested in accordance to **ISO 8301 / MS ISO 8302**.

- Thermal resistance, R-value: 1.950 m²K/W
- Thermal transmittance, U-value: 0.513 W/m²K
- Thermal conductivity, K-value: 0.051 W/mK

BQ SPECIFICATION

To supply & install **AIR-TAC BUBBLE FOIL BB238FR-10** under **MS2095:2014** and **CIDB certified double-sided aluminium bubble foil** as described.

GO GREEN

Environmental friendly green product recognized through

- Green building Index (GBI) by MGBC

APPLICATION

- It widely used under roof for food industry, farmhouse, agricultural storage and poultry building.
- Highly recommended for building or construction which required superior radiant heat insulation and dominant tensile strength for heavy duty roof systems.
- No wire netting is required for support.
- As a reflective insulation under all types of roof coverings in commercial, industrial and residential building.

INSTALLATION GUIDELINE

- Users are advised to install this product by an air space of at least 2" (5.0 cm) below the roof to maximize the effectiveness of this product.

AIR-TAC BUBBLE FOIL, BB238FR-10 (MS 2095 : 2014)



Reflectivity / Emissivity	ASTM C1371	≥ 95 % / ≤ 5%	
Tensile Strength (MD)	AS/NZ 1301.448s	≥ 4.5 kN/m	Extra Heavy
Tensile Strength (CD)	AS/NZ 1301.448s	≥ 4.5 kN/m	Extra Heavy
Edge Tear Resistance (MD)	TAPPI T470	≥ 50 N	Heavy
Edge Tear Resistance (CD)	TAPPI T470	≥ 50 N	Heavy
Vapor Barrier (WVTR)	ASTM E96	≥ 450 MN.s/g	High
Resistance to Dry Delamination	AS/NZS 4201.1	No Delamination	Passed
Resistance to Wet Delamination	AS/NZS 4201.2	No Delamination	Passed
Shrinkage	AS/NZS 4201.3	< 0.5 %	Passed
Grammage	Electronic scale	180 - 250 GSM	
Thickness	Digital caliper	3 ± 1 mm	
Sound Reduction	In-house	11 - 12 %	Test at 87 db
Sound Transmission Loss (STC)	ASTM E90	STC 5	

* Technical information provided represents average result of tests conducted under standard procedure and is subject to variation.

* No guarantee can be made regarding specific applications or patent rights.

Standard Size: 1.22m (Width) X 40m (Length)

BB238FR-10

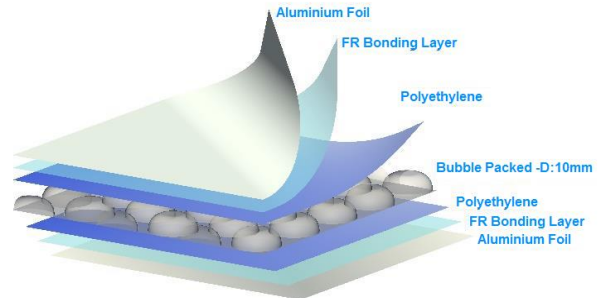

FOIL LAMINATE INDUSTRIES SDN BHD (343587-X)

Factory / HQ: 1139, Lorong Perindustrian Bukit Minyak 11, Taman Perindustrian Bukit Minyak, 14100 Simpang Ampat, Penang, Malaysia.

Tel: 604-5011999

Fax: 604-5011991

Email: ask@foil-laminate.com

Branch Office: 11 (1st Floor), Jalan PJS 9/5, Bandar Sunway, 46150 Petaling Jaya, Selangor, Malaysia

Tel: 603-56214868

Fax: 603-56214878

Email: ask@foil-laminate.com

